

Menardi FF-D filter frame with filter service door


FF-D

Menardi FF-D is a filter frame for installation of filter pads with a filter access door.

On the inlet side the frame is equipped with a filter access door. The filter is kept in place compressed between 2 mesh layers (mesh 10x10mm), one layer in the service door and one in the outer fixed frame.

The filter access door clamps are designed to be maintained in position by pop rivets, preventing the door clamp to open during operation.

At high dust concentrations and/or when large filters mats are supplied filter support hooks, which are punched through the media, can be offered as an option. Advice Menardi to know when needed.

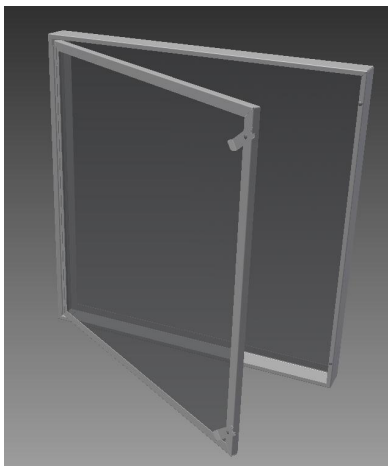

- Simple to install
- Door clamps with locking device preventing door to open during operation.
- Available in sizes from 100x100 mm up to 1500x1500 mm.
- Available in various depths to fit all types of filter media.
- Can be supplied painted, in galvanized steel, stainless AISI 304 and AISI 316L.
- Filter supporting hooks can be supplied as an option.

